


Load Diagram

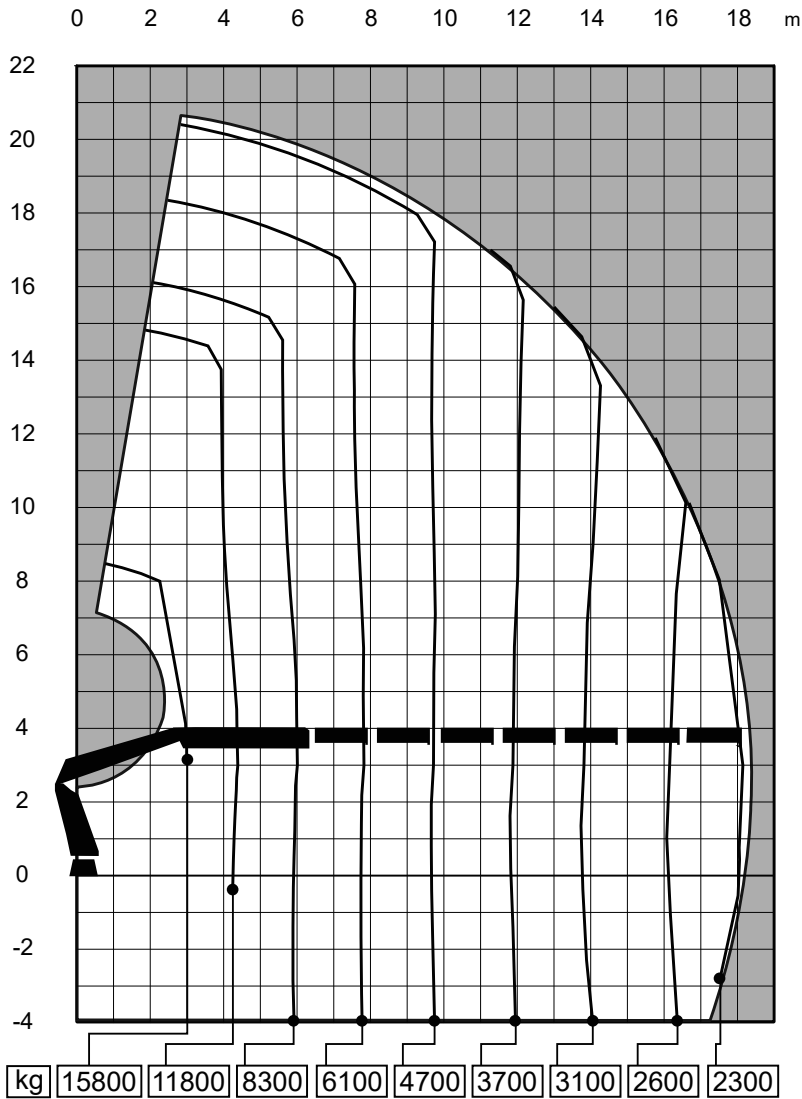

Capacity and performance

Lifting capacity with ADC	511	(kNm)
Standard lifting capacity at standard outreach with ADC	3.1 (m) - 15800 (kg)	
	4.4 (m) - 11800 (kg)	
	6.0 (m) - 8300 (kg)	
	7.8 (m) - 6100 (kg)	
	9.7 (m) - 4700 (kg)	
	11.7 (m) - 3700 (kg)	
	13.8 (m) - 3100 (kg)	
	16.0 (m) - 2600 (kg)	
	18.2 (m) - 2300 (kg)	

Hydraulic boom extension	13.9	(m)
Lifting height above installation level hydraulic	20.8	(m)
Slewing torque	60	(kNm)
V80 Slewing speed	10	(°/s)
Slewing angle	Continuous	(°)
Lifting speed	1.3	(m/s)

Functional demands

Recommended oilflow low	90	(l/min) V91M Fixed
Recommended oilflow high	140	(l/min) V91M Variable
Working pressure	32	(MPa)
Max slope viable at full capacity	5	(°)
Oil in tank	200	(l)
Tank capacity	260	(l)

Weights and measurements

Height in folded position	2467	(mm)
Width in folded position	2498	(mm)
Installation space needed	1653	(mm)
Weight of crane	6100	(kg)

Side View Unfolded Close in Area

